

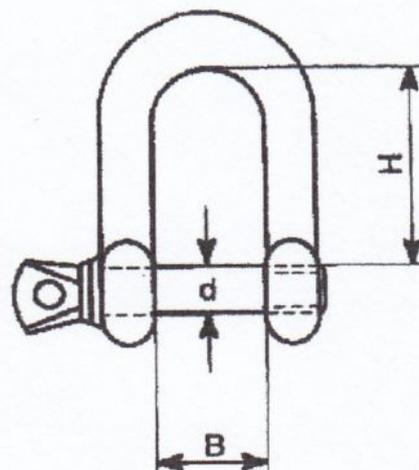
TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

STRMEŇOVÁ SPOJKA KLASICKÁ DEE SHACKLE

DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
Klíňanská cesta 1225
029 01 Námestovo
Slovenská republika

Tel.: +421 43 5523371-3
Fax: +421 43 5522986
www.orvex.com


**KONTROLNÉ ČÍSLO
CONTROL NO.**
12/GM/2009

ROZMER/SIZE	d [mm]	B [mm]	H [mm]	Zaťaženie pracovné Working load [kg]	Zaťaženie trhacie Breaking load [kg]	Váha/ks Weight/pc [kg]
3,5 mm	4	8	16	50	150	0,0082
5 mm	5	10	19	80	240	0,0146
6 mm	6	12	24	100	300	0,0248
8 mm	8	16	32	200	600	0,0510
10 mm	10	20	40	320	960	0,1086
12 mm	12	25	48	520	1560	0,2056
14 mm	14	28	56	650	1950	0,3248
16 mm	16	32	64	800	2400	0,4874
18 mm	18	36	71	1000	3000	0,7076
20 mm	20	38	76	1100	3300	0,9122
22 mm	22	44	85	1500	4500	1,2850
25 mm	25	50	95	2100	6300	1,8496
28 mm	28	56	106	3000	9000	2,5068
32 mm	32	64	120	3500	10500	3,1668
38 mm	38	76	145	5000	15000	6,2002
45 mm	45	80	155	7000	21000	10,810

MATERIÁL / MATERIAL
C 15
KRYTIE / COVERING
zinok / galv.

Tolerancia rozmerov +/- 5 %
Dimension tolerance +/- 5 %

**TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
ORIGINAL JE K DISPOZÍCII V SÍDLE SPOLOČNOSTI
ORVEX, SPOL. S R.O.**

THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY
ORVEX, SPOL. S R.O.

DÁTUM / DATE

01.01.2010