

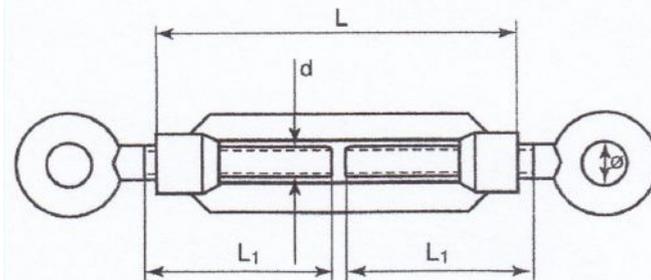
TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

RÍMSKA SKRUTKA OKO + OKO DIN 1480 TURNBUCKLE WITH EYE / EYE DIN 1480

DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
Klíňanská cesta 1225
029 01 Námestovo
Slovenská republika

Tel.: +421 43 5523371-3
Fax: +421 43 5522986
www.orvex.com


**KONTROLNÉ ČÍSLO
CONTROL NO.**
5/GM/2009

ROZMER/SIZE	L [mm]	L1 [mm]	∅ [mm]	d	Zaťaženie pracovné Working load [kg]	Zaťaženie trhacie Breaking load [kg]	Váha/ks Weight/pc [kg]
5 mm	70	35	8	M5	150	450	0,0502
6 mm	110	55	9	M6	175	525	0,0926
8 mm	110	57	10	M8	325	975	0,1294
10 mm	125	68	14	M10	500	1500	0,2856
12 mm	125	70	16	M12	700	2100	0,4108
14 mm	140	75	18	M14	750	2250	0,6002
16 mm	170	88	22	M16	1350	4050	0,8898
18 mm	200	98	25	M18	1500	4500	1,2738
20 mm	200	105	25	M20	2050	6150	1,5614
22 mm	220	118	28	M22	2250	6750	1,9632
24 mm	255	135	28	M24	3000	9000	2,8286
28 mm	255	135	31	M27	5000	15000	3,8758
32 mm	295	148	36	M32	6750	20250	5,4818

MATERIÁL / MATERIAL
C 15
KRYTIE / COVERING
zinok / galv.

Tolerancia rozmerov +/- 5 %
Dimension tolerance +/- 5 %

**TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
ORIGINAL JE K DISPOZÍCII V SÍDLE SPOLOČNOSTI
ORVEX, SPOL. S R.O.**

**THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY
ORVEX, SPOL. S R.O.**

DÁTUM / DATE

01.01.2010