

TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

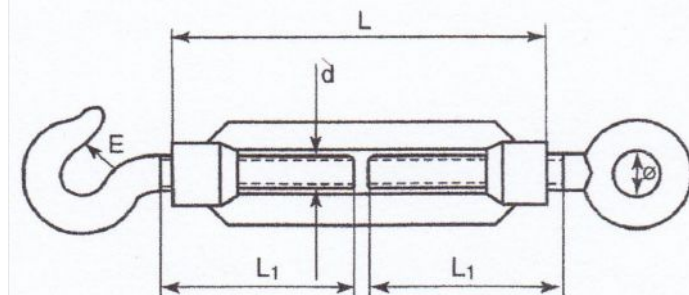
RÍMSKA SKRUTKA OKO + HÁK DIN 1480
TURNBUCKLE WITH EYE / HOOK DIN 1480
DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
 Klíňanská cesta 1225
 029 01 Námestovo
 Slovenská republika

Tel.: +421 43 5523371-3

Fax: +421 43 5522986

www.orvex.com


**KONTROLNÉ ČÍSLO
 CONTROL NO.**
3/GM/2009

ROZMER/SIZE	L [mm]	L1 [mm]	E [mm]	Ø [mm]	d	Zaťaženie pracovné Working load [kg]	Zaťaženie trhacie Breaking load [kg]	Váha/ks Weight/pc [kg]
5 mm	70	35	7	8	M5	50	125	0,0498
6 mm	110	55	9	9	M6	70	175	0,0912
8 mm	110	57	11	10	M8	140	350	0,1552
10 mm	125	68	13	14	M10	220	550	0,2808
12 mm	125	70	15	16	M12	310	770	0,4222
14 mm	140	75	18,5	18	M14	450	1120	0,6030
16 mm	170	88	20	22	M16	600	1500	0,9080
18 mm	200	98	19	25	M18	750	1875	1,3216
20 mm	200	105	20	24	M20	910	2270	1,6264
22 mm	220	118	25	28	M22	1100	2750	2,1972
24 mm	255	135	25	28	M24	1300	3250	3,0572
28 mm	255	135	31,5	31	M27	1900	4750	4,3588
32 mm	295	148	38	36	M32	2200	5500	5,9846

MATERIÁL / MATERIAL
C 15
KRYTIE / COVERING
zinok / galv.

Tolerancia rozmerov +/- 5 %

Dimension tolerance +/- 5 %

TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
ORIGINAL JE K DISPOZÍCII V SÍDL E SPOLOČNOSTI
ORVEX, SPOL. S R.O.

THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
 ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY
 ORVEX, SPOL. S R.O.

DÁTUM / DATE

01.01.2010