

TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

REŤAZ TECHNICKÁ TRIEDY 8 GRADE 8 TECHNICAL CHAIN


DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
 Klíňanská cesta 1225
 029 01 Námestovo
 Slovenská republika

Tel.: +421 43 5523371-3
 Fax: +421 43 5522986
 www.orvex.com

KONTROLNÉ ČÍSLO CONTROL NO.

18/GM/2009

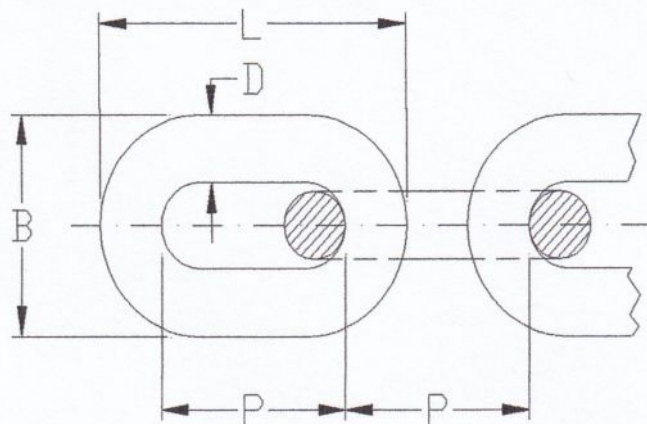

ROZMER/SIZE (D)	D _{tol} [mm]	P [mm]	P _{tol} [mm]	B _{max} [mm]	L _{max} [mm]	Predĺženie pred roztrhnutím Elongation [min.%]	Pracovné zaťaženie Working load [T]	Zaťaženie skúšobné Proof force [kN]	Trhacia sila Breaking force [kN]	Váha/m Weight/m [kg]
6 mm	+/- 0,24	18	+/- 0,5	22,2	30,5	20	1,12	28,3	45,2	0,8
7 mm	+/- 0,28	21	+/- 0,6	25,9	36,1	20	1,5	38,5	61,6	1,1
8 mm	+/- 0,32	24	+/- 0,7	29,6	40,7	20	2	50,3	80,4	1,4
9 mm	+/- 0,36	27	+/- 0,8	33,3	45,8	20	2,54	62	98,1	1,8
10 mm	+/- 0,40	30	+/- 0,9	37	50,9	20	3,15	78,5	126	2,2
13 mm	+/- 0,52	39	+/- 1,2	48,1	66,2	20	5,3	133	212	3,8
16 mm	+/- 0,64	48	+/- 1,4	59,2	82,4	20	8	201	322	5,7
20 mm	+/- 1,00	60	+/- 1,8	74	99	20	12,5	314	503	9

MATERIÁL / MATERIAL

legovaná ocel' / alloy steel

KRYTIE / COVERING

mazanie / grease

Tolerancia rozmerov +/- 5 %
 Dimension tolerance +/- 5 %

TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
 ORIGINAL JE K DISPOZÍCII V SÍDLE SPOLOČNOSTI
 ORVEX, SPOL. S R.O.

THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
 ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY ORVEX,
 SPOL. S R.O.

DÁTUM / DATE

01.01.2010