

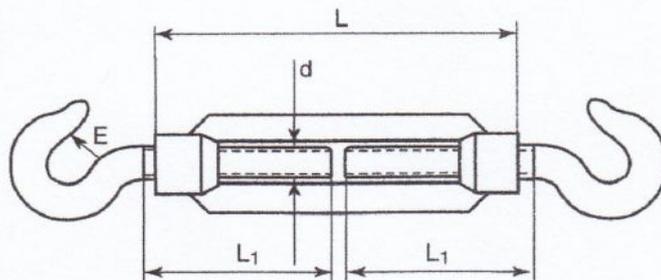
# TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

## RÍMSKA SKRUTKA HÁK + HÁK DIN 1480 TURNBUCKLE WITH HOOK / HOOK DIN 1480

**DODÁVATEĽ / SUPPLIER**

**ORVEX, spol. s r.o.**  
Klíňanská cesta 1225  
029 01 Námestovo  
Slovenská republika

Tel.: +421 43 5523371-3  
Fax: +421 43 5522986  
www.orvex.com


**KONTROLNÉ ČÍSLO  
CONTROL NO.**
**4/GM/2009**

ROZMER/SIZE	L [mm]	L1 [mm]	E [mm]	d	Zaťaženie pracovné Working load [kg]	Zaťaženie trhacie Breaking load [kg]	Váha/ks Weight/pc [kg]
5 mm	70	35	7	M5	50	125	0,0486
6 mm	110	55	8,5	M6	70	175	0,0860
8 mm	110	57	10	M8	140	350	0,1644
10 mm	125	68	13	M10	220	550	0,2860
12 mm	125	70	15	M12	310	770	0,4338
14 mm	140	75	17	M14	450	1120	0,6164
16 mm	170	88	20	M16	600	1500	0,9426
18 mm	200	98	20	M18	750	1875	1,3964
20 mm	200	105	25	M20	910	2270	1,6842
22 mm	220	118	25	M22	1100	2750	2,4438
24 mm	255	135	26,5	M24	1300	3250	3,3034
28 mm	255	135	33	M27	1900	4750	4,8068
32 mm	295	148	35,5	M32	2200	5500	6,3782

**MATERIÁL / MATERIAL**
**C 15**
**KRYTIE / COVERING**
**zinok / galv.**

Tolerancia rozmerov +/- 5 %  
Dimension tolerance +/- 5 %

**TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.  
ORIGINAL JE K DISPOZÍCII V SÍDLE SPOLOČNOSTI  
ORVEX, SPOL. S R.O.**

**THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE  
ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY  
ORVEX, SPOL. S R.O.**

**DÁTUM / DATE**

-----  
01.01.2010