

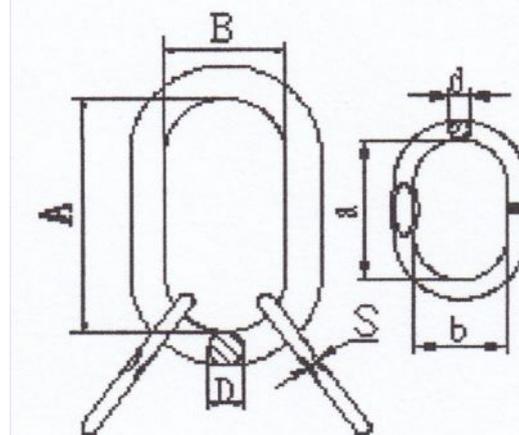
TECHNICKÉ PARAMETRE TECHNICAL PARAMETERS

GM32-G8 ZÁVESNÉ OKO KOMPLET EN 1677-4 GM32-G8 MASTER LINK ASSEMBLY EN 1677-4

DODÁVATEĽ / SUPPLIER

ORVEX, spol. s r.o.
Klíňanská cesta 1225
029 01 Námestovo
Slovenská republika

Tel.: +421 43 5523371-3
Fax: +421 43 5522986
www.orvex.com


**KONTROLNÉ ČÍSLO
CONTROL NO.**
79/GM/2010

ROZMER SIZE	A [mm]	B [mm]	D [mm]	S [mm]	a [mm]	b [mm]	d [mm]	Trhacia sila Breaking force [kN]	Zaťaženie skúšobné Proof force [kN]	Pracovné zaťaženie Working load [T]	Váha/ks Weight/ks [kg]
6 mm	135	75	18	8,5	54	25	14	92,6	57,9	2,36	1,272
7 mm	135	75	18	8,5	60	36	14	124,0	77,2	3,15	1,338
8 mm	160	90	22	10	70	34	16	166,7	104,2	4,25	2,210
10 mm	180	100	25	11	85	40	18	262,8	164,3	6,7	3,235
13 mm	200	110	32	13	115	50	22	439,0	275,0	11,2	5,941
16 mm	260	140	37,5	16	140	65	25	666,9	416,8	17	9,448
18 mm	340	180	46,5	21,5	180	100	32	832,0	520,0	21,2	19,800
20 mm	350	190	50	20	180	100	32	1039,5	649,7	26,5	23,000
22 mm	350	190	50	23,5	180	100	35	1240,0	772,0	31,5	25,000
26 mm	400	200	56	26,5	200	110	39	1765,2	1103,3	45	35,800
28 mm	430	220	63	32	200	110	44	1960,0	1230,0	50	47,500
32 mm	460	250	72	35	200	110	48	2628,2	1642,6	67	64,000

MATERIÁL / MATERIAL
20CrNiMo
KRYTIE / COVERING
lak. / paint

Tolerancia rozmerov +/- 5 %
Dimension tolerance +/- 5 %

**TENTO DOKUMENT JE URČENÝ PRE INFORMATÍVNE ÚČELY.
ORIGINAL JE K DISPOZÍCII V SÍDLĚ SPOLOČNOSTI
ORVEX, SPOL. S R.O.**

THIS DOCUMENT IS FOR INFORMATIVE PURPOSES ONLY. THE
ORIGINAL IS AVAILABLE IN HEADQUARTER OF COMPANY ORVEX,
SPOL. S R.O.

DÁTUM / DATE

01.01.2010